



TIGER

352 / 352 MA

TIGER 352, manual vertical sawing machine to cut from 60° left to 45° right, with HSS blade.

A FEW FEATURES:

- Sawing head movement on double linear guides with preloaded slides with recirculating ballscrews.
- Electrical panel (wiring totally identifiable, main lockable disconnect switch, motor magneto-thermal overload, minimum tension coil, protection against missing phase, low tension safety device 24 V).








- Low voltage IP55 control handle.
- Rotating table on a center pin with axial bearing which allows higher precision on the cutting angle set.
- Double set of gears to obtain a high performance.
- Four speeds blade rotation 15/30/45/90 rpm (OPTIONAL 30/60/90/180 rpm).
- Vice with anti-burr device with double clamping of the piece.

- Wire chip brush for band cleaning.
- Adjustable rod to measure stop to make cuts of the same length with millimetred steel rod.
- Stock support arm with roller predisposed to mount loading table.
- Steel base with chip drawer and removable coolant tray.
- Electrical pump for the blade lubrication and cooling.

- The machine is supplied without saw blade.
 - Service keys and instructions manual for maintenance and spare parts list.
- The vice on the TIGER 352 MA (pneumatic vice) opens and closes by means of a manually operated valve (or by means of a footpedal which is instead optional).

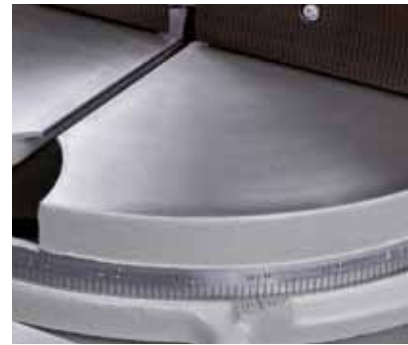

OPTIONALS FROM PAG 61 - N° 02 - 03 - 05 - 09 - 13 - 26 - 39 - 43 - 70



HSS	kW	rpm	mm	0°	∅	○	□	▭	∅	■	kg
					350	115	95	180x95	350	90	
mm				45°	350	110	95	125x95	350	64	
350x32x2,5	1,8/2,5	15/30/45/90	190	60°	350	90	90	90x90	350	45	
				45°	350	110	95	125x95	350	64	380

